

OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER

SECTION 4 TOWNSHIP 15 RANGE 2

DATE: 8-23-07

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Hendricks survey monu disk

METHOD OF ESTABLISHMENT: County: dn 3"


4-21-01

IN. S.P.C. E ZONE NAD '83

NAME: 15020404

N: 502298.0463(m)

E: 43434.7150(m)

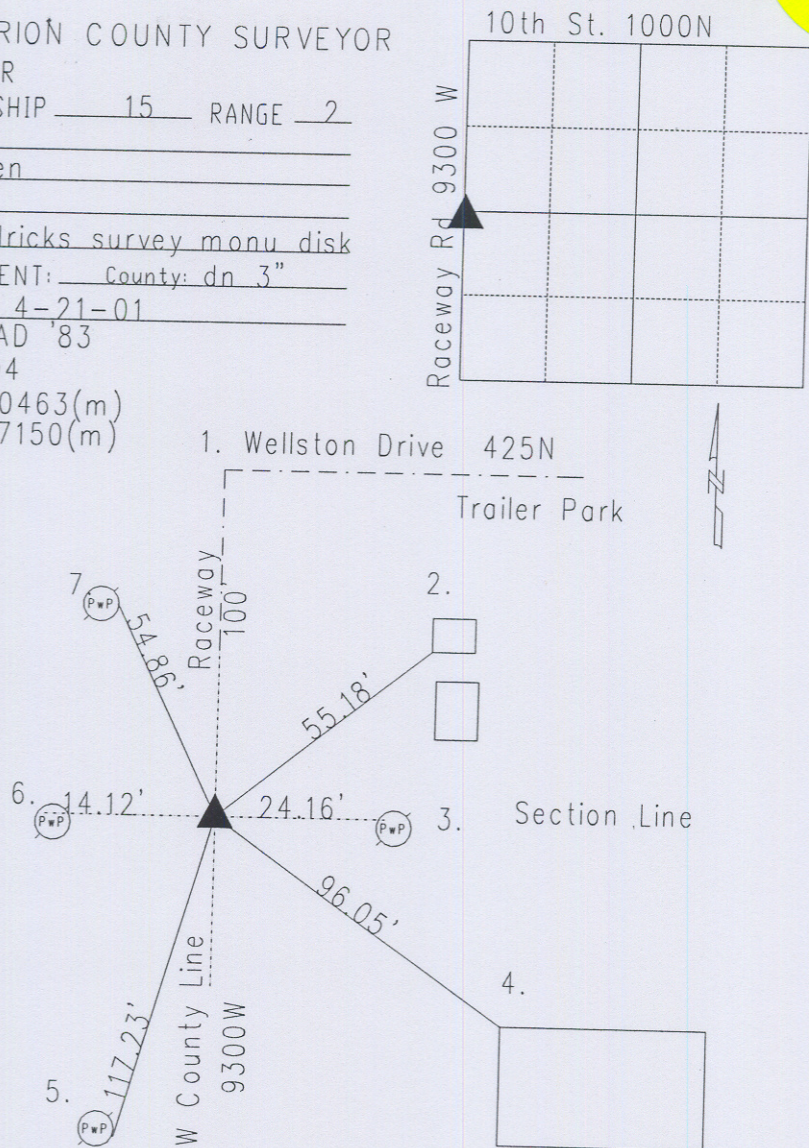

Original post set 1820 by Laughlin with witness: 10" beech N 10 E 16 links; 12" elm S 22 E 3 links per Marion County Atlas pg. 2. Coyner 4-19 thru 21, 1900 called stake set for line and measurement and interested parties were to set rocks. 4-10-57 called same. 12-2-71 called railroad spike. Excavated 9-8 88 railroad spike found at surface, 24" hub found 6" down. .20' S & .10' W of railroad spike, stone found 12" down. .05' E of railroad spike. Harrison set. Re-tied 11-28-75. Re-tied 4-21-01 by Wilcoxon. Re-tied 8-27-07 by Wilcoxon. New mounment is Hendricks survey monument disk down 3", 8-27-07. 15020404

REF.	DISTANCE	DESCRIPTION
1.	100.'	Due N to C/I of Wellsten Drive : Trailer Park
2.	55.18'	Mag nail in anchor bolt of power box #349-R
3.	24.16'	PK nail N PwP#178-491WB 4"up
4.	96.05'	NW corner of house @ brick #347
5.	117.23'	PK nail F pwP#39-521YA 12"up
6.	14.12'	Mag nail w/bw N PwP#52-491VB 3"up
7.	54.86'	PK nail w/washer F PwP#1-B-491YB 8"up